
APPLICATION NOTE

VACUUM FLUORESCENT DISPLAY MODULE

AN-E-3162B



GRAPHIC DISPLAY MODULE

GP1047A01A INSTRUCTION MANUAL

GENERAL DESCRIPTION

FUTABA GP1047A01A is a graphic display module using a FUTABA 256 × 16 VFD.

It consists of a driver, a control circuit and power source.

The module can be connected directly to the bus line of the host system CPU.

Important Safety Notice

Please read this note carefully before using the product.

Warning

- The module should be disconnected from the power supply before handling.
- The power supply should be switched off before connecting or disconnecting the power or interface cables.
- The module contains electronic components that generate high voltages which may cause an electrical shock when touched.
- Do not touch the electronic components of the module with any metal objects.
- The VFD used on the module is made of glass and should be handled with care. When handling the VFD, it is recommended that cotton gloves be used.
- The module is equipped with a circuit protection fuse.
- Under no circumstances should the module be modified or repaired.
Any unauthorized modifications or repairs will invalidate the product warranty.
- The module should be abolished as the factory waste.

1. FEATURES

- 1-1. High quality and long life can be achieved with FUTABA VFD.
- 1-2. Compact and light-weight unit by using packed display drivers and one-chip VFD control.
- 1-3. Driven through a simple interface.
- 1-4. High speed 8bits data write-in capability.

2. GENERAL SPECIFICATIONS

2-1. DIMENSIONS, WEIGHT (Refer to APPENDIX-1)

Table-1

Item	Specification	Unit
Outer Dimensions	(L) 525 ± 1.0	mm
	(W) 59.5 ± 0.4	
	(T) 40 Max.	
Weight	850 Max.	g

2-2. SPECIFICATIONS OF THE DISPLAY PANEL

Table-2

Item	Specification	Unit
Display Area	460.5 × 35.7	mm
Number of Dots	256 × 16	Dot
Dot Pitch	1.8 × 2.25	mm
Dot Size	1.5 × 1.95	mm
Color Illumination	Green($\lambda_p=505\text{nm}$)	–
Luminance	300 Typ.	cd/m ²

Note)

By using a filter, uniform color ranging from blue to orange (including white) can be obtained.

2-3. ENVIRONMENT CONDITIONS

Table-3

Item	Symbol	Min.	Max.	Unit
Operating Temperature	T_{opr}	0	+60	°C
Storage Temperature	T_{stg}	-20	+70	°C
Operating Humidity	H_{opr}	20	80	%
Storage Humidity	H_{stg}	20	90	%
Vibration (10~55Hz)	–	–	2	G
Shock	–	–	40	G

Note) Avoid operations and or storage in moist environmental conditions.

2-4. ABSOLUTE MAXIMUM RATINGS

Table-4

Item	Symbol	Min.	Max.	Unit
Supply Voltage	V_{CC}	-0.5	7.0	Vdc
Input Signal Voltage	V_{IS}	0.5	$V_{CC}+0.5$	V

2-5. RECOMMENDED OPERATING CONDITIONS

Table-5

Item	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V_{CC}	4.5	5.0	5.5	Vdc
H-Level Input Voltage	V_{IH}	2.2	–	–	V
L-Level Input Voltage	V_{IL}	–	–	0.8	V

2-6. ELECTRICAL CHARACTERISTICS


Table-6

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Current (Note 1)	I_{CC}	$V_{CC}=5.0V_{dc}$ All on	–	4.5	5.5	A
Power Consumption	–		–	22.5	27.5	W
Luminance	L		150 (44)	300 (88)	–	cd/m^2 (fL)
H-Level output Voltage	V_{OH}	$V_{CC}=4.5V$ $I_{OH}=-2mA$	3.8	–	–	V
L-Level output Voltage	V_{OL}	$V_{CC}=4.5V$ $I_{OL}=3.2mA$	–	–	0.4	V

Note 1) The surge current can be approx.5 times the specified supply current at power on.

GP1047A01A OUTER DIMENSION

APPENDIX-1

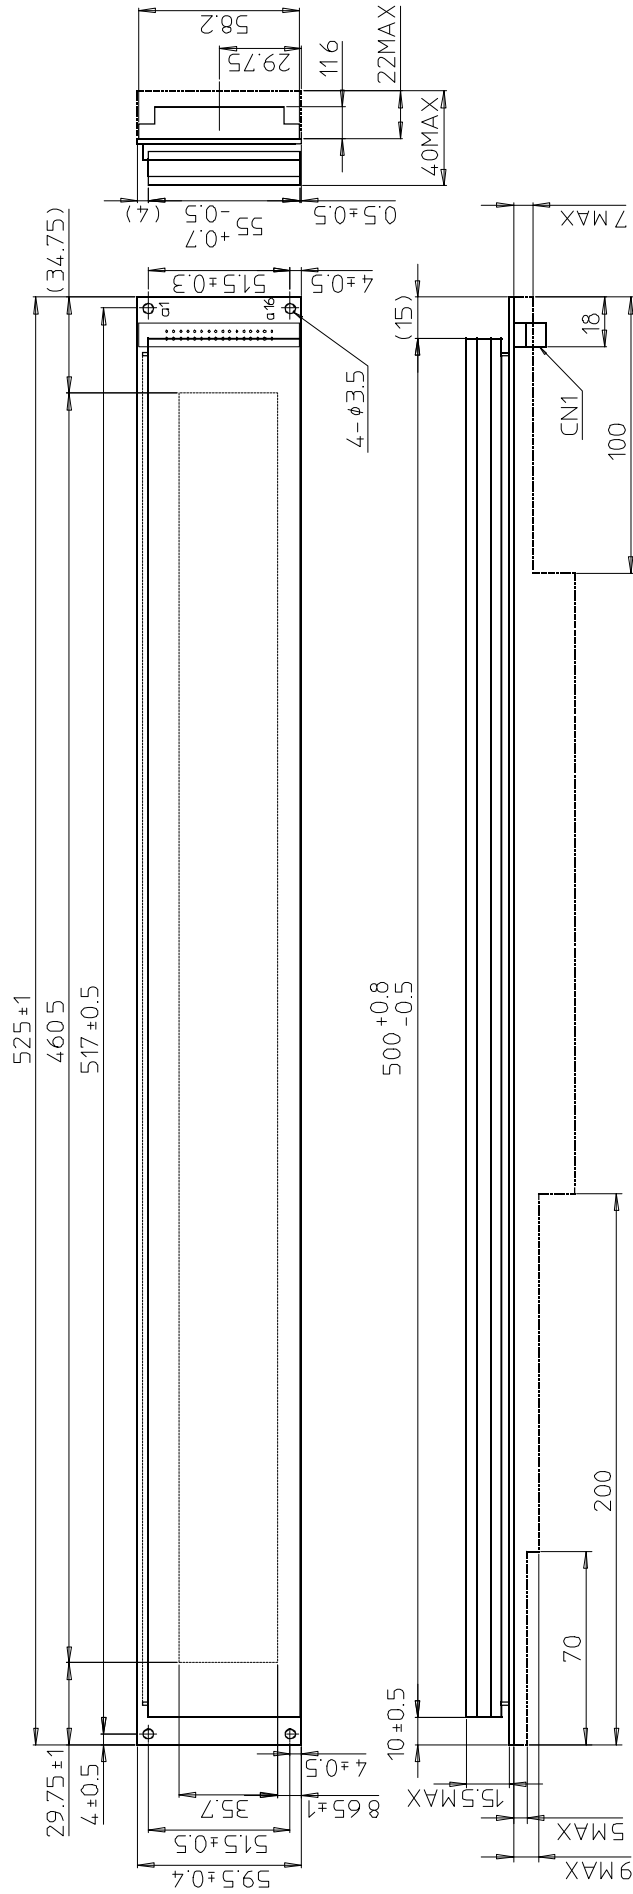

GP1047A01A CIRCUIT BLOCK DIAGRAM

APPENDIX-2

